


Specifications

Item	Performance							
Category temperature range (°C)	-25 to +85							
Tolerance at rated capacitance (%)	-20 to +80							
Internal resistance at 1 kHz	Rated Capacitance (F) 0.047 0.1 0.22 0.47 0.68 1.0							
	Internal resistance (Ω) 300 200 120 50 50 30							
Characteristics at high and low temperature	Percentage of capacitance change Within ±30% of the value at 20°C Internal resistance less than five times of the value at 20°C							
	Test time 1000 hours							
Endurance (85°C)	Percentage of capacitance change Within ±30% of the initial measured value							
	Internal resistance Within four times of the initial specified value							
Shelf life (85°C)	Test time :1000 hours ; Same as endurance.							

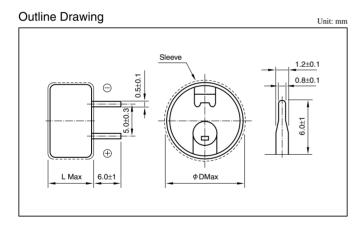

Part numbering system (example: 5.5V0.1µF)							
Environmental item		DH Series code	. —	5R5 Rated voltage symbol	D	104 Rated capacitance symbol	Т
Former item		DH Series code		5R5 Rated voltage symbol	D	104 Rated capacitance symbol	

Standard Ratings

Max. operating voltage(V)	Rated capacitance(F)	ELNA Parts No.	ø DxL(mm)
5.5	0.047	DH-5R5D473T	13.5x9.5
5.5	0.1	DH-5R5D104T	13.5x9.5
5.5	0.22	DH-5R5D224T	13.5x9.5
5.5	0.47	DH-5R5D474T	21.5x9.5
5.5	0.68	DH-5R5D684T	21.5x9.5
5.5	1.0	DH-5R5D105T	21.5x9.5

