


PER-V01B

Computing Platform Service Partner

Mini PCI DVI to TTL Module

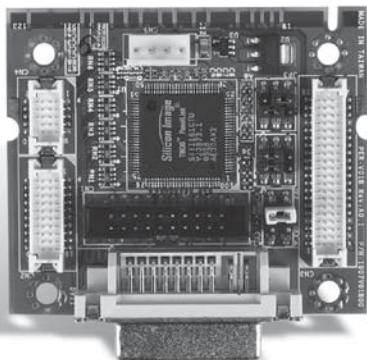

Features

- Supports DVI to TTL LCD Signal Conversion
- Resolution Supports up to 1024 x 768

Packing List

- Quick Installation Guide
- PER-V01B

Ordering Information

- **TF-PER-V01B-A10**
Mini PCI DVI to TTL LCD Signal Conversion Module for 640x480 Panel Rev. A1.0
- **TF-PER-V01B-A10-01**
Mini PCI DVI to TTL LCD Signal Conversion Module for 800x600 Panel Rev. A1.0
- **TF-PER-V01B-A10-02**
Mini PCI DVI to TTL LCD Signal Conversion Module for 1024x768 Panel Rev. A1.0

Optional Accessories


- **1703200151**
20P-20P Terminal Cable

Specifications

| | |
|---------------------------|--|
| Form Factor | Mini PCI Type III A 2" x 2.35" (50.8mm x 59.6mm) |
| Signal Conversion Chipset | Silicon Image Sil1160CTU |
| Power Requirement | +3.3V |
| Operating Temperature | 32°F ~ 140°F (0°C ~ 60°C) |

PER-V02B

Mini PCI TTL to DVI LCD Signal Conversion Module

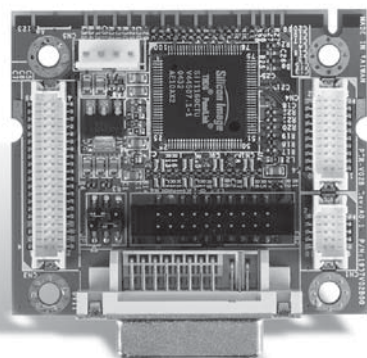

Features

- Supports TTL to DVI LCD Signal Conversion
- Resolution Supports up to 1600 x 1200

Packing List

- TTL LCD Cable
- Quick Installation Guide
- PER-V02B

Ordering Information

- **TF-PER-V02B-A10**
Mini PCI TTL to DVI LCD Signal Conversion Module Rev. A1.0

Optional Accessories

- **1700200200**
DVI Cable
- **1703400207**
TTL Cable for PFM-530I, PFM-535I, PFM-620S, GENE-6310B, GENE-6320, GENE-6350, PCM-6892A/B, PCM-6893, ETX-625

Specifications

| | |
|---------------------------|--|
| Form Factor | Mini PCI Type III A 2" x 2.35" (50.8 mm x 59.6 mm) |
| Signal Conversion Chipset | Silicon Image Sil1160CTU |
| Power Requirement | +3.3V |
| Operating Temperature | 32°F ~ 140°F (0°C ~ 60°C) |