


IPC Motherboards MB770

iBASE

LGA775 Pentium® 4 Mini-ITX Motherboard w/ ATi RS400 Chipset

Pentium® 4-Based

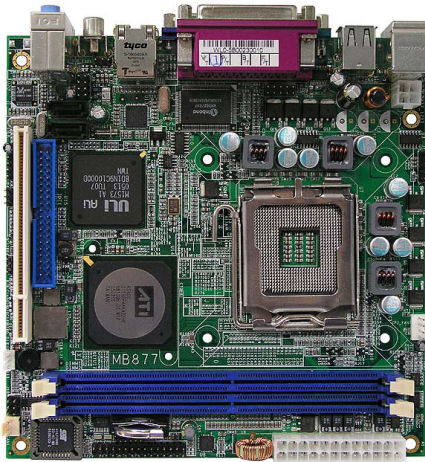

Features

- Embedded Via Eden-V4 / C7 processor
Up to 2.0GHz, 400/533MHz FSB
- DDR2 DIMM x 1, Max. 1GB
- Integrated VGA, support 18-bit/24-bit dual channel LVDS
- 10/100 LAN1 on board, optional Gigabit LAN for LAN2
- 6 x USB 2.0, 2 x SATA ports
- 4 COM ports, IrDA, Watchdog timer
- 1 x PCI, 1 x Mini PCI slot, optional TV-out

System

CPU	VIA Eden-V4 / C7, up to 2.0GHz
System Memory	DDR2 DIMM x 1, Max. 1GB
System Chipset	VIA CN700 + VT8237R+, 400/533MHz FSB
BIOS	Award 4Mbit
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slot	1 PCI, 1 Mini PCI

Ethernet

Controller	VIA VT8237R+ built-in 10/100 and optional Realtek RTL8110S-32-LF Gigabit LAN
Connector	One or two RJ-45 on board

Multi I/O

Chipset	Winbond W83697HF + Fintek F81216D 2x IDE (UDMA33/66/100/133), 1x FDD, 1x KB, 1x Mouse 4x RS-232, 2x SATA (RAID 0/1)
USB	6 ports on board
Audio	VIA VT8237R+ built-in audio + AC97 codec
Others	ATX power connector

Graphics

VGA Controller	VIA CN700 integrated
VGA Memory	Shared memory Max. 64MB
LCD Interface	VIA VT1636 for 18-bit or 24-bit dual channel LVDS

Mechanical & Environmental

Dimensions	170mm x 170mm
Max. Power Requirement	TBC
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-68°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

MB770	VIA Eden-V4 400MHz, CN700 chipset, Mini-ITX w/ 10/100 LAN, Mini PCI, SATA
MB770F	VIA Eden-V4 1.0GHz, CN700 chipset, Mini-ITX w/ 10/100, Gigabit LAN, Mini PCI, SATA

WWW.IBASE-USA.COM

IBASE Technology (USA), Inc.

1-800-292-4500

408-992-0888 sales@ibase-usa.com
1050 Stewart Drive • Sunnyvale • CA 94085 • U.S.A.