


CP-114UL/UL-I

4-port RS-232/422/485 Universal PCI serial board with optional 2 KV isolation

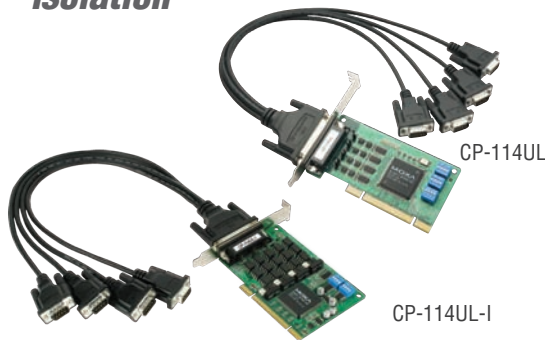

- > Over 700 Kbps data throughput for top performance
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Universal PCI compatible with 3.3/5 V PCI and PCI-X
- > Serial communication speed up to 921.6 Kbps
- > Drivers provided for Windows (2000, XP/2003/Vista/2008 x86/x64, 9X/ME/NT), Windows CE 5.0/6.0, Windows XP Embedded, DOS, Linux 2.4, Linux 2.6 (x86/x64), FreeBSD 4/5, QNX 6, SCO Open Server 5/6, UnixWare 7
- > Easy maintenance with on-board LED display
- > On-board 15 KV ESD and 2 KV optical isolation protection
- > Wide temperature model available for -40 to 85°C environment

The certification logos shown here apply to some or all of the products in this section. For details, see "Regulatory Approvals" under "Specifications" below.



Overview

Moxa's CP-114UL/UL-I series of multiport serial boards are designed to be used by industrial automation system integrators for long distance, multi-point, PC-based data acquisition applications. On-chip Automatic Data Direction Control for precision RS-485 communication requires precise timing control to enable and disable the line driver. The Moxa Turbo Serial Engine™ chip that powers the CP-114UL/UL-I

boards come with on-chip ADDC®, which makes RS-485 as easy to use as RS-232. In RS-485 mode, the serial port can connect up to 31 daisy-chained RS-485 devices within a range of 1.2 km. For long distance RS-485 communication, 2 KV optical isolation protections are available to prevent equipment damage.

Support for Major Windows and Linux/Unix OS drivers

Moxa continues to support a wide variety of operating systems, and the CP-114UL/UL-I boards are no exception. Reliable Windows COM and Linux/Unix TTY drivers are provided for all Moxa boards, and other

operating systems, such as WEPOS, are also supported for embedded integration.

Specifications

Hardware

Comm. Controller: MU860 (16C550C compatible)

Bus: 32-bit Universal PCI

Connector: DB44 female

Serial Interface

Number of Ports: 4

Serial Standards: RS-232/422/485

Max. Number of Boards per PC: 4

ESD Protection: 15 KV on the board

Optical Isolation: 2 KV (CP-114UL-I only)

Performance

Baudrate: 50 bps to 921.6 Kbps

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

I/O Address: Assigned by BIOS

IRQ: Assigned by BIOS

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

RS-422: TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND

RS-485-4w: TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND

RS-485-2w: Data+(B), Data-(A), GND

Driver Support

Operating Systems: Windows (2000, XP/2003/Vista/2008 x86/x64, 9X/ME/NT), Windows CE 5.0/6.0, Windows XP Embedded, DOS, Linux 2.4, Linux 2.6 (x86/x64), FreeBSD 4/5, QNX 6, SCO Open Server 5/6, UnixWare 7

Physical Characteristics

Dimensions: 64.4 x 120 mm (2.53 x 4.72 in)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 55°C (32 to 131°F)

Wide Temp. Models: -40 to 85°C (-40 to 185°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -20 to 85°C (-4 to 185°F)

Regulatory Approvals

FCC: Part 15 Class B

EMS: EN55022, EN55024, EN61000-3-2, EN61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 (DIPS)

Power Requirements

Power Consumption:

CP-114UL: 320 mA @ +5 V (for RS-232)


Warranty

Warranty Period: 5 years


Details: See www.moxa.com/warranty

Dimensions

CP-114UL

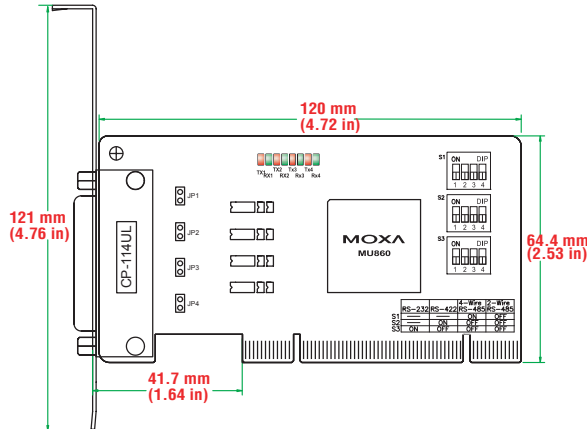

CP-114UL-I

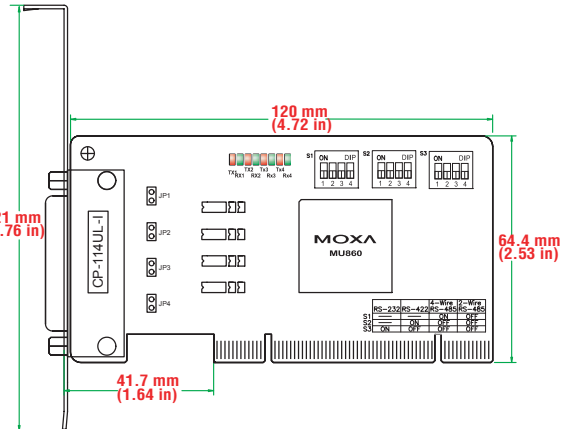

Ordering Information

Available Models

CP-114UL: 4-port RS-232/422/485 low profile Universal PCI board, 0 to 55°C operating temperature

CP-114UL-DB9: 4-port RS-232/422/485 low profile Universal PCI serial board, 0 to 55°C operating temperature (includes DB9 male cable)

CP-114UL-DB25: 4-port RS-232/422/485 low profile Universal PCI serial board, 0 to 55°C operating temperature (includes DB25 male cable)

CP-114UL-I: 4-port RS-232/422/485 low profile Universal PCI serial board with optical isolation, 0 to 55°C operating temperature

CP-114UL-I-DB9: 4-port RS-232/422/485 low profile Universal PCI serial board with optical isolation, 0 to 55°C operating temperature (includes DB9 male cable)

CP-114UL-I-DB25: 4-port RS-232/422/485 low profile Universal PCI serial board with optical isolation, 0 to 55°C operating temperature (includes DB25 male cable)

CP-114UL-T: 4-port RS-232/422/485 low profile Universal PCI serial board, -40 to 85°C operating temperature

CP-114UL-I-T: 4-port RS-232/422/485 low profile Universal PCI serial board with optical isolation, -40 to 85°C operating temperature

Package Checklist

- CP-114UL or CP-114UL-I board
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card

Connection Options (can be purchased separately)


CBL-M44M9x4-50

DB44 male to DB9 male x 4 (50 cm cable)



PIN	RS-232	RS-422	RS-485-4w	RS-485-2w
1	DCD	TxD-(A)	TxD-(A)	---
2	RxD	TxD+(B)	TxD+(B)	---
3	TxD	RxD+(B)	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	RxD-(A)	Data-(A)
5	GND	GND	GND	GND
6	DSR	---	---	---
7	RTS	---	---	---
8	CTS	---	---	---
9	---	---	---	---

DB9 male



CBL-M44M25x4-50

DB44 male to DB25 male x 4 (50 cm cable)



PIN	RS-232	RS-422	RS-485-4w	RS-485-2w
2	TxD	RxD+(B)	RxD+(B)	Data+(B)
3	RxD	TxD+(B)	TxD+(B)	---
4	RTS	---	---	---
5	CTS	---	---	---
6	DSR	---	---	---
7	GND	GND	GND	GND
8	DCD	TxD-(A)	TxD-(A)	---
20	DTR	RxD-(A)	RxD-(A)	Data-(A)
22	---	---	---	---

DB25 male

