



Features



- Dual-Core Intel® Atom™ Processor D2700
- DDR3-1066 memory support, up to 4GB
- 2M battery backup SRAM
- Software based OSD function control
- IP65 front panel protection
- Resistive pouch panel (optional capacitive or SAW)
- 1x PCI expansion slot
- Slim & compact design

Specifications

System Mainboard	IB806
CPU Type	Intel® Atom™ Processor D2700
Memory	1033 /1066 DDR3, up to 4G
Construction	Aluminum & SGCC
Chassis	Silver
I/O Interface	2x Gigabit LAN (RJ45) 1x 10/100 LAN (RJ45) 4x USB 2.0 (USB Host. A-Type) COM1 RS-232/422/485 1x 12V DC-in 1x VGA 1x speaker-out microjack 1x Mic-in microjack 2x SMA connector (reserved for Mini PCI-E module for WiFi / Bluetooth / HSDPA)
Expansion I/O	1x PCI slot
Storage	1x 2.5" HDD drive bay
Mounting	VESA mount, 100mmX100mm
Power Supply	+12V DC-in, 84W power adaptor
Dimensions	320mm(W) x 270mm(H) x 33.5mm(D)
LCD Size	12.0" TFT LCD
LCD Color	16.7M colors
Touch Screen	Resistive Touch Panel
Display Resolution	1024 x 768
LCD Brightness	500 cd/cm2
Dot Pitch	240um x 240um
Viewing Angle	160/160
Backlight MTBF	50,000 Hrs
Operating Temperature	0°C~ 45°C
Storage Temperature	-10°C~60°C
Relative Humidity	90%
Protection Class	IP65 (Front panel with wall mount)

Ordering Information

iPPC12A7M-RE	12" Modularized Panel PC with IB806, Intel® Atom™ D2700 2.13GHz,DDR3 So-DIMM up to 4GB, with resistive touch
iPPC12A7-RE	12" Modularized Panel PC with IB806, Intel® Atom™ D2700 2.13GHz, with 2GB DDR3 1333,160GB HDD and resistive touch
iPPL12A0-RE	12.1" iPPC Display with Resistive touch module

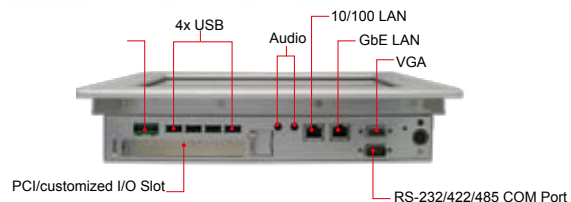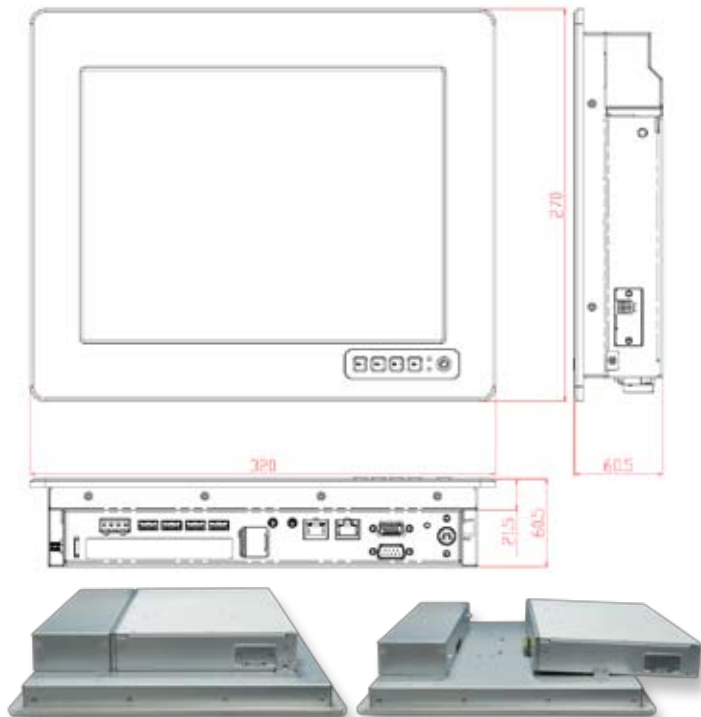

- 1 eFlex Platform
- 2 Motherboards
- 3 Disk-Size SBCs
- 4 CPU Modules
- 5 PC/104 Plus
- 6 CPU Cards
- 7 Embedded Systems
- 8 Network Security Appliance