



# cPCIS-2630/cPCIS-2830 3U CompactPCI® Subsystem with 8-slot Backplane and 400 W ATX Power Supply

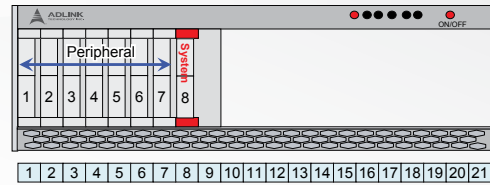

cPCIS-2630R/cPCIS-2830R Inside Front View

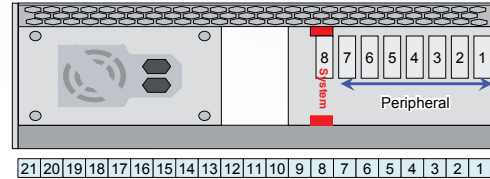

cPCIS-2630R/cPCIS-2830R Inside Rear View

## Features


- 3U CompactPCI® backplane with seven peripheral slots and one system slot
- Temperature, voltage, and fan monitoring LEDs
- Supports rear I/O backplane with P2 connectors for cPCI 50mm/80mm depth RTMs
- Temperature, voltage, and fan monitoring LEDs
- Hot-swappable cooling fans & filter
- 400 W ATX Power supply

## Ordering Information


| Model Name              | System | Peripheral | Rear                | Alarm Module | PSU QTY | PSU MAX | PICMG®   |
|-------------------------|--------|------------|---------------------|--------------|---------|---------|----------|
| cPCIS-2630/cPCIS-2830   | 1      | 7          | 1 *system slot only | Yes          | 1       | 400 W   | 2.0, 2.1 |
| cPCIS-2630R/cPCIS-2830R | 1      | 7          | 8                   | Yes          | 1       | 400 W   | 2.0, 2.1 |

Note: All models above do not include any system or peripheral boards.

# cPCIS-2632/cPCIS-2832 3U CompactPCI® Subsystem with 8-slot Backplane and 1 + 1 CompactPCI® Redundant Power Modules

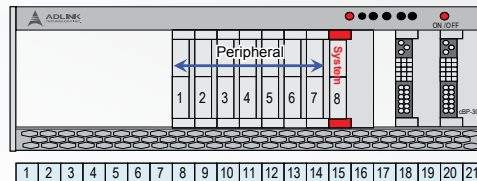

cPCIS-2632R/cPCIS-2832R Inside Front View

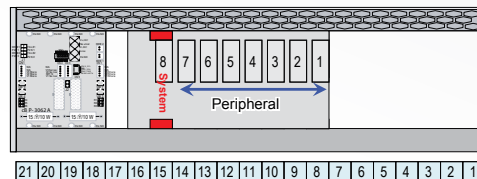

cPCIS-2632R/cPCIS-2832R Inside Rear View

## Features

- 3U CompactPCI® backplane with seven peripheral slots and one system slot
- Temperature, voltage, and fan monitoring LEDs
- Supports current sharing on +5 V, +3.3 V, and +12 V
- 1 + 1 hot swappable 250 W + 250 W CompactPCI® power supplies
- PICMG® 2.11 47-pin power interface
- Hot-swappable cooling fans & filter
- Supports rear I/O backplane with P2 connectors for cPCI 50mm/80mm depth RTMs

## Ordering Information

| Model Name              | System | Peripheral | Rear                | Alarm Module | PSU QTY | PSU MAX       | PICMG®         |
|-------------------------|--------|------------|---------------------|--------------|---------|---------------|----------------|
| cPCIS-2632/cPCIS-2832   | 1      | 7          | 1 *system slot only | Yes          | 2       | 500 W (1 + 1) | 2.0, 2.1, 2.11 |
| cPCIS-2632R/cPCIS-2832R | 1      | 7          | 8                   | Yes          | 2       | 500 W (1 + 1) | 2.0, 2.1, 2.11 |

Note: All models above do not include any system or peripheral boards.