


A-SA-NMNF-01

Surge arrester, N-type (female) to N-type (male)

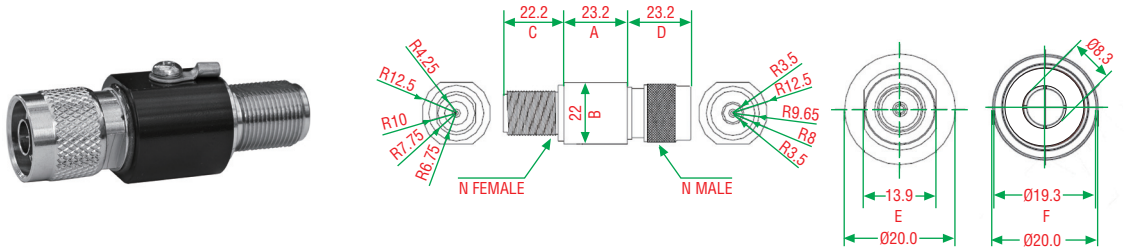

Unit: mm

Specifications

Characteristics

Connector Type: N-Female to N-Male

Frequency: 0-6 GHz

V.S.W.R:

0-5 GHz 1 : 1.5

5-6 GHz 1 : 2.0

Insertion Loss: 0.5 dB

DC Breakdown Voltage: 90±20% (@100V/S)

Impulse Breakdown Voltage: <600V (@1KV/μs)

AC Discharge Current: 5 A (@50Hz)

Surge Discharge Current: 5 kA (@8/20μs)

Insulation Resistance: ≥1000 mΩ

Electrode Capacitance: < 1.5P

Warranty

Warranty Period: 1 year

Details: See www.moxa.com/warranty

Ordering Information

Available Models

A-SA-NMNF-01: Surge arrester, 0-6 GHz, N-type (female) to N-type (male)

Can be used with the following series

AWK-3121, AWK-3131, AWK-5222, AWK-5232, AWK-4121, AWK-4131, AWK-6222, and AWK-6232 Series