



## CMI200-952F



### Features

- AMD Athlon™ II X2/X4 processors, up to 65W
- Supports 1x serial port
- 2x 10/100/1000Base-T LAN
- 6x USB 2.0 ports
- Supports HDMI, DVI-I, or DVI-D interface, dual display
- Supports 1x 2.5" SATA HDD drive bay

### Specifications


System Mainboard	MI952F
CPU Type	AMD Athlon™ AMD Athlon™ X2 AMD Athlon™ II X2/X4 *** Support CPU Wattage, Up to 65W ***
CPU Package	AM2, AM2+, & AM3
System Chipset	AMD 780E + SB710
Build-In Graphic Controller	AMD 780E built-in Radeon HD3200 IGP w/ 128MB side port frame buffer
Memory	2 x DDR2 667/800 MHz DIMM, Max. 4GB
Chassis Color	Black
Construction	SECC
Front Panel External I/O	Power On/Off button
Rear Panel External I/O	1x HDMI 1x DVI-I 1x DVI-D 6x USB 2.0 1x DB9 (RS232) 2x RJ45 (Gigabit LAN) 6x Audio Jack (Line In, Line Out, Microphone, Side Surround, Rear Surround, Center/LFE) 1x PS2 (KB/MS) 1x AC-inlet
Storage	1x 2.5" HDD drive bay
Power Supply	180W Flex ATX Power Supply Input Voltage : 90 ~ 264 Volt Input Frequency : 47 ~ 63 Hz
Mounting	Optional wall mount kit
Dimensions	278.4mm(W) x 183.6mm(D) x 46.8mm(H)

### Environmental

Operating Temperature	0°C~ 45°C (32°F~113°F)
Storage Temperature	-20° ~ 80°C
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Non-Operating : 1.0 grms / 5~500Hz / random Operating : 0.25 grms / 5~500Hz / random

### Ordering Information

CMI200-952F	Signage System with MI952F Mini-ITX, 2.5" HDD Bracket and 180W Power Supply
-------------	---

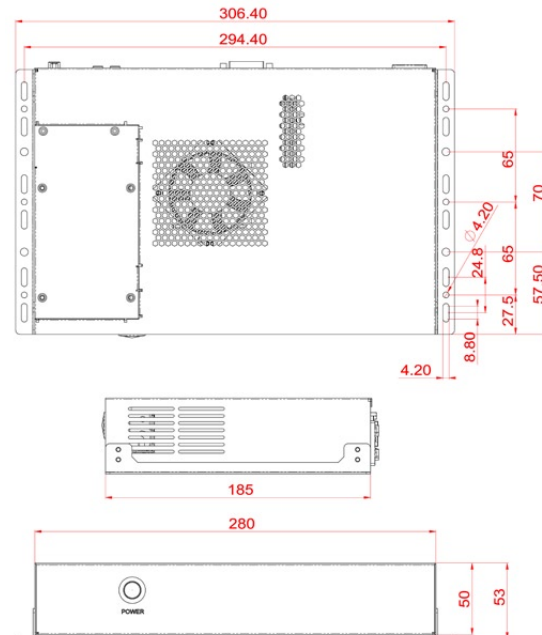

Remarks: 1. Use only CPU/heatsink with height fitting the chassis-not touching the chassis top cover.  
2. ODM/OEM is available.

- 1 Motherboards
- 2 Disk-Size SBCs
- 3 CPU Modules
- 4 PC/104 Puls
- 5 CPU Card
- 6 Embedded Systems
- 7 Network Security Appliance