


# EMB-B75A

Mini-ITX Embedded Motherboard with Intel® 2nd/3rd Generation Core™ i7/ i5/ i3 Processor

10

Embedded & Industrial Motherboards

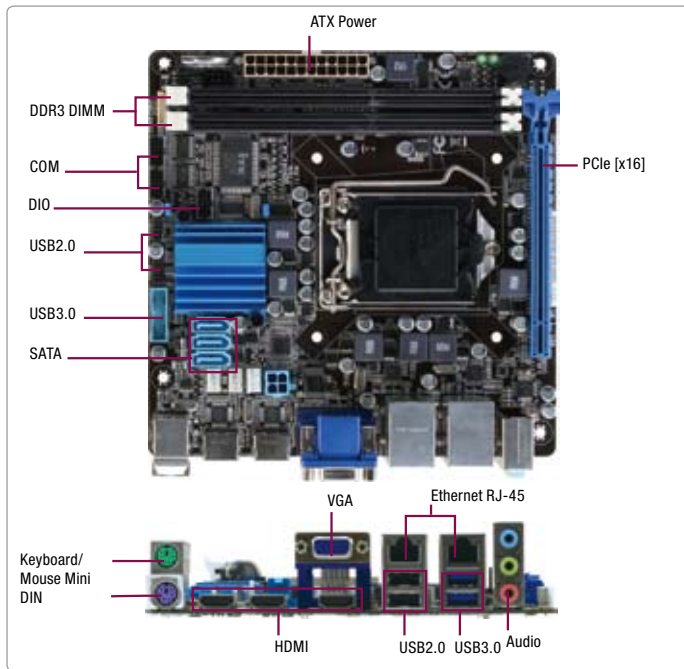

## Features

- Intel® 2nd/3rd Generation Core™ i7/i5/i3 Processor
- DDR3 1600/1333/1066 MHz DIMM x 2, Max. 16GB
- Dual/Three Independent Display: VGA, HDMI x 3
- Gigabit Ethernet x 2
- On Board TPM Infineon SLB9635 TT 1.2
- USB3.0 and SATA 6.0 Gb/s



## Specifications

System	
Form Factor	Mini-ITX
Processor	Intel® Socket 1155 for 2nd/3rd Generation Core™ i7/ i5/ i3/ Pentium® / Celeron® Processors up to 95W
System Memory	240-pin DIMM x 2, Max. 16GB (8GB per DIMM), DDR3 1333/1066 MHz Memory
Chipset	Intel® B75 chipset
I/O Chipset	ITE 8728F
Ethernet	Realtek® RTL8111F, Gigabit Ethernet, RJ-45 x 2
BIOS	AMI BIOS, 64MB ROM
Wake On LAN	Yes
Watchdog Timer	255 level and can be set by software
TPM	Infineon SLB9635 TT1.2
H/W Status Monitoring	Temperature Monitor on CPU/Chassis Voltage Monitor on Vcore /5V/3.3V/12V Fan Monitor on CPU/Chassis
Expansion Interface	PCIe [x16] slot x 1
Battery	Lithium battery
Power Requirement	24-pin ATX connector x 1, 4-pin ATX 12V Power connector x 1, CPU fan x 1, System fan x 1 with 4-pin wafer for Smart FAN support
Power Consumption	73W @ Intel® Core™ i7-3770K, DDR3 1600/8GB, ATX
Board Size	6.7" x 6.7" (170mm x 170mm)
Gross Weight	1.1 lb (0.5 kg)
Operation Temperature	32°F ~140°F (0°C ~60°C)
Storage Temperature	-40°F ~185°F (-40°C ~85°C)
Operation Humidity	0% ~ 90%RH, non-condensing
MTBF (Hours)	116,000
Display	
Graphic	Intel® Graphics Media Accelerator
Graphic Engine	Intel® HD Graphics 2500, Intel® HD Graphics 4000 with i7 CPU
Resolution	Up to 1920 x 1200 @60 Hz for VGA Up to 1920 x 1080 @60Hz for HDMI
Output Interface	VGA x 1, HDMI x 3
I/O	
Storage	SATA 6.0Gb/s x 1, SATA 3.0Gb/s x 2
Serial Port	RS-232/422/485 x 1 supports +5/+12V, RS-232 x 1
USB	USB 3.0 (On rear I/O) x 2, USB 3.0 (Box header 2.00mm) x 4 USB 2.0 (On rear I/O) x 2, USB 2.0 (Pin header 2.00mm) x 6
Digital I/O	8-bit programmable
PS/2 Port	PS/2 x 2 (Keyboard & Mouse)
Audio	Line-in, Mic-in, Line-out


## Packing List

- SATA Cable x 2
- Metal I/O Bracket
- Product CD
- EMB-B75A

# EMB-B75A

## Dimension

Unit: mm

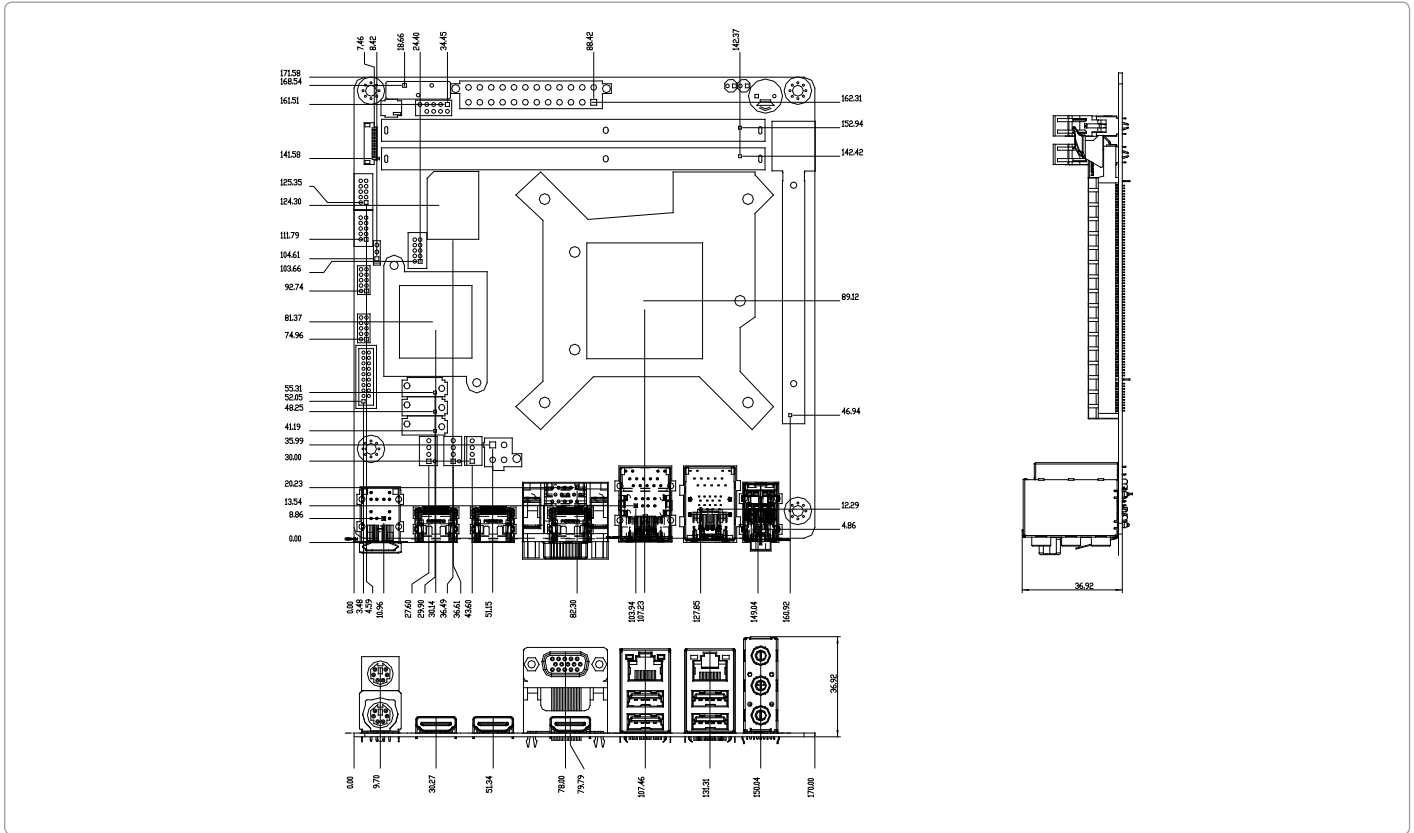

## Ordering Information

Part number	CPU	RAM	Fan/Fanless	Display	Storage	LVDS	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Temp.
EMB-B75A-A10	Socket	DIMM	Fan	VGA/HDMI x 3	SATA3 x 1 SATA2 x 2	—	GbE x 2	USB3.0 x 4 USB2.0 x 6	1	1	PCIe [x16] x 1	ATX	0°C ~ 60°C

## Optional Accessories

- CPU Cooler
- 1700190450  
USB3.0 Cable
- 1709070800  
SATA Cable
- 1701100206  
COM Port Cable
- USB2.0 Cable