


ECB-901A

Industrial Computing Platform Partner

Standard ETX Carrier Board

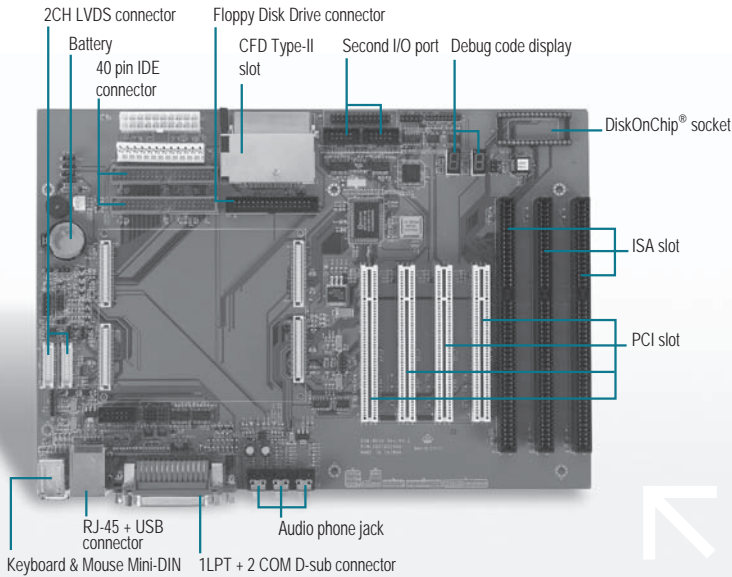

Features

- PCI and ISA Expansion Interface
- ATX Form Factor



Specifications

System	
I/O Chipset	Winbond W83977
Ethernet	10/100M Base-TX RJ-45
SSD	Type II CompactFlash™ slot x 1, DiskOnChip® socket x 1
Expansion Interface	PCI slot x 4, ISA slot x 3
Battery	Lithium battery
Power Requirement	+5V, +12V. AT/ATX
Board Size	12"(L) x 8.27"(W) (305mm x 210mm)
Gross Weight	1.32lb (0.6Kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Display	
LCD Interface	LVDS
TV-out	Composite / S-Video
LVDS	Up to dual channel LVDS
I/O	
MIO	UDMA100 x 2, Floppy Disk Drive x 1, PS/2 Keyboard x 1, PS/2 Mouse x 1, RS-232 x 3, RS-232/422/485 x 1, Parallel x 1
IrDA	One IrDA Tx/Rx header
Audio	MIC-in, Line-in, Line-out
USB	4 USB ports

Packing List

- 1701400453 40 Pin ATA100 Cable
- 1701340601 34 Pin Floppy Disk Drive Cable
- 9657666600 Jumper Cap
- Quick Installation Guide
- Utility CD
- ECB-901A

Ordering Information

- **ECB-901A-A10**
ETX Carrier Board, PCI, ISA, ATX, Rev.A1.0

Optional Accessories

- **P90657B000**
CompactFlash™ Cover.