


PCI-1753 PCI-1753E

96-ch Digital I/O Card

96-ch Digital I/O Extension Card for PCI-1753

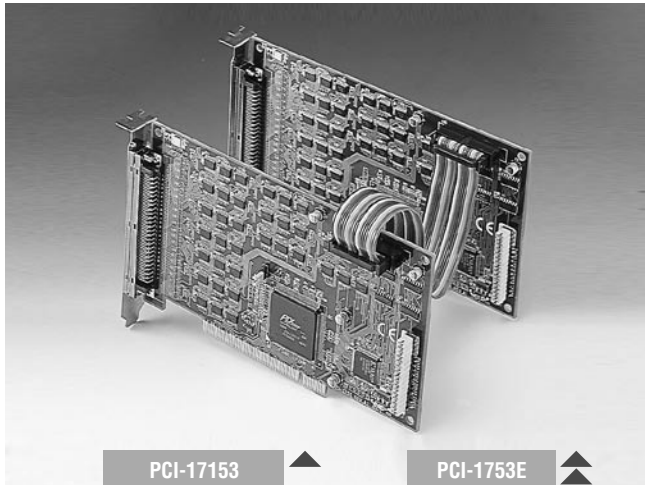

Features

- Up to 192 (96+96) TTL digital I/O lines
- Emulates mode 0 of 8255 PPI
- Buffered circuits for higher driving capacity than 8255
- Multiple-source interrupt handling
- Interrupt output pin for simultaneously triggering external devices with the interrupt
- Output status read-back
- "Pattern match" and "Change of state" interrupt functions for critical I/O monitoring
- Keeps I/O setting and digital output values when hot system reset
- Supports dry contact and wet contact
- High-density 100-pin SCSI connector

Introduction

PCI-1753 is a 96-bit digital I/O card for the PCI bus, which can be extended to 192 digital I/O channels by connecting its extension board - PCI-1753E. The card emulates mode 0 of the 8255 PPI chip, but the buffered circuits offer a higher driving capability than the 8255. The 96 I/O lines are divided into twelve 8-bit I/O ports: A0, B0, C0, A1, B1, C1, A2, B2, C2, A3, B3 and C3. You can configure each port as input or output via software.

Specifications

Digital Input/Output

- **I/O Channels** 96 digital I/O lines for PCI-1753
192 digital I/O lines if extending with PCI-1753E
- **Programming Mode** 8255 PPI mode 0
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.
Logic 1: 2.0 V min.
- **Output Voltage** Logic 0: 0.44 V max.
Logic 1: 3.76 V min.
- **Output Capability** Sink: 0.44 V max. @ 24 mA
Source: 3.76 V min. @ 24 mA

General

- **Bus Type** PCI V2.2
- **I/O Connector** 1 x 100-pin SCSI female connector (Centronics™)
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: +5 V @ 400 mA
Max: +5 V @ 2.7 A
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F) (refer to IEC 68-2-1, 2)
- **Storing Temperature** -20 ~ 70° C (-4 ~ 158° F) (refer to IEC 68-2-3)
- **Storing Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCI-1753** 96 ch. Digital I/O Card, user's manual and driver CD-ROM. (cable not included)
- **PCI-1753E** Extension Board for PCI-1753
- **PCL-10268** 100-pin to 2x68-pin SCSI cable, 1 and 2m (PCL-10268 100-pin SCSI-II male connector P/N: 16549A0000)
- **ADAM-3968** 68-pin SCSI wiring terminal for DIN-rail mounting
- **ADAM-3968/20** 68-pin SCSI-II to Three 20-pin Wiring Terminal Module for DIN-Rail Mounting
- **ADAM-3968/50** 68-pin SCSI wiring terminal for DIN-rail mounting
- **PCLD-8751** 48-ch Isolated DI Board
- **PCLD-8761** 24-ch Relay and 24-IDI Board

Applications

- Industrial AC/DC I/O devices for monitoring and controlling
- Relay and switch monitoring and controlling
- Parallel data transfer
- TTL, DTL and CMOS logic signal sensing
- Indicator LED driving

Pin Assignments

PA00	1	51	PA20
PA01	2	52	PA21
PA02	3	53	PA22
PA03	4	54	PA23
PA04	5	55	PA24
PA05	6	56	PA25
PA06	7	57	PA26
PA07	8	58	PA27
PB00	9	59	PB20
PB01	10	60	PB21
PB02	11	61	PB22
PB03	12	62	PB23
PB04	13	63	PB24
PB05	14	64	PB25
PB06	15	65	PB26
PB07	16	66	PB27
PC00	17	67	PC20
PC01	18	68	PC21
PC02	19	69	PC22
PC03	20	70	PC23
PC04	21	71	PC24
PC05	22	72	PC25
PC06	23	73	PC26
PC07	24	74	PC27
GND	25	75	GND
PA10	26	76	PA30
PA11	27	77	PA31
PA12	28	78	PA32
PA13	29	79	PA33
PA14	30	80	PA34
PA15	31	81	PA35
PA16	32	82	PA36
PA17	33	83	PA37
PB10	34	84	PB30
PB11	35	85	PB31
PB12	36	86	PB32
PB13	37	87	PB33
PB14	38	88	PB34
PB15	39	89	PB35
PB16	40	90	PB36
PB17	41	91	PB37
PC10	42	92	PC30
PC11	43	93	PC31
PC12	44	94	PC32
PC13	45	95	PC33
PC14	46	96	PC34
PC15	47	97	PC35
PC16	48	98	PC36
PC17	49	99	PC37
VCC	50	100	VCC

PA00 ~PA07: I/O pins of Port A0
PA10 ~PA17: I/O pins of Port A1
PA20 ~PA27: I/O pins of Port A2
PA30 ~PA37: I/O pins of Port A3
PB00 ~PB07: I/O pins of Port B0
PB10 ~PB17: I/O pins of Port B1
PB20 ~PB27: I/O pins of Port B2
PB30 ~PB37: I/O pins of Port B3
PC00 ~PC07: I/O pins of Port C0
PC10 ~PC17: I/O pins of Port C1
PC20 ~PC27: I/O pins of Port C2
PC30 ~PC37: I/O pins of Port C3
GND: Ground
VCC: +5V voltage output