


PCLD-785 PCLD-785B PCLD-885


16-channel Relay Output Board

24-channel Relay Output Board

16-channel Power Relay Output Board

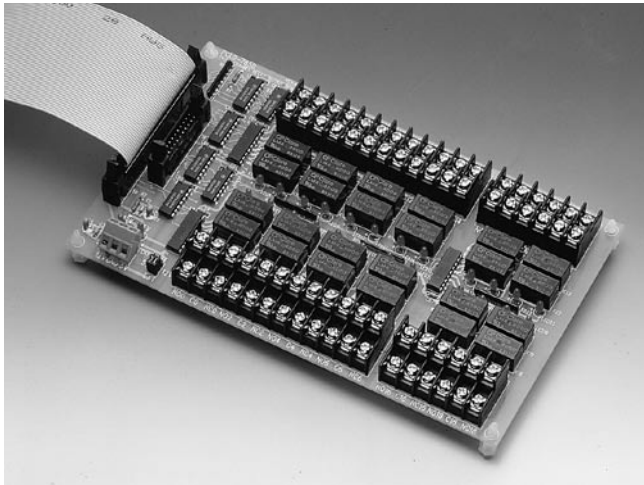

PCLD-785/785B

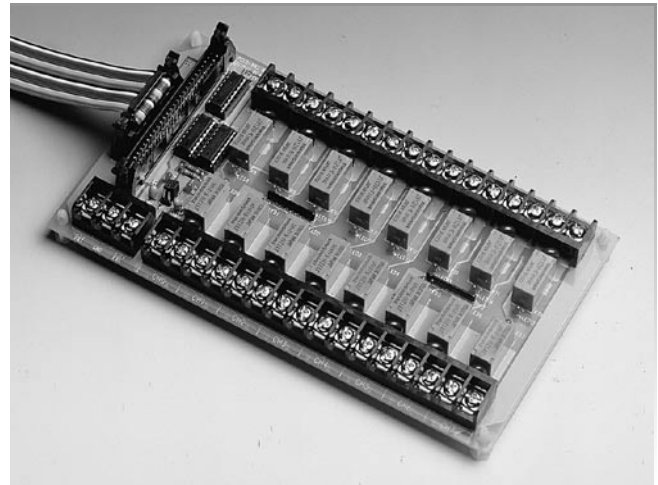

PCLD-885



Features

- Compatible with PC-LabCard™ products with 20-pin digital output connector and 50-pin Opto-22 digital output connector (PCLD-785B only)
- Automatic selection of control logic (PCLD-785B only): Negative logic for the Opto-22 connector Positive logic for the 20-pin flat cable connector
- Relays: PCLD-785: 16 SPDT, PCLD-785B: 16 or 24 SPDT
- On-board relay driver circuits
- Screw terminals for easy output wiring
- LED status indicators

Specifications

Relay

- Channels**

PCLD-785:	16 (CN1, 20-pin conn.)
PCLD-785B:	16 (CN1, 20-pin conn.) 24 (CN2, 50-pin conn.)
- Contact Ratings** 120 V_{AC} @ 0.5 A, 30 V_{DC} @ 1 A
- Contact Resistance** < 100 mΩ
- Control Logic** 20-pin flat cable conn.: Input TTL high (+5 V) = Relay on
50-pin Opto-22 conn.: Input TTL low (0 V) = Relay on
- Operation Time** 5 ms max.
- Insulation Resistance** 100 MΩ
- Life Expectancy**

AC: 5 × 10 ⁶ @ 110 V/0.3 A
DC: 5 × 10 ⁶ @ 24 V/1.25 A
- Relay Type** SPDT (Single-Pole Double-Throw) Form C
- Release Time** 5 ms max.

General

- Connectors**

PCLD-785:	Input: 20-pin flat cable Output: Screw clamp terminal block (PCLD-785)
PCLD-785B:	Input: 50-pin Opto-22, 20-pin flat cable Output: Barrier strip terminal block (PCLD-785B)
- Dimensions (LxW)**

PCLD-785:	114 x 220 mm (4.5" x 8.7")
PCLD-785B:	132 x 220 mm (5.2" x 8.7")
- Power Consumption** +5 V @ < 100 mA; +12 V @ 33 mA for each relay
- Power Input** 20-pin connector:
+5 V_{DC}: Jumper select either PC bus or external supply
+12 V_{DC}: Jumper select either PC bus or external supply
50-pin connector: external 12 V supply

Ordering Information

- PCLD-785B** 24-channel Relay Output Board, user's manual, 1m 20-pin flat cable assembly (P/N: PCL-10120-1) and 1.2m 50-pin flat cable assembly (P/N: PCL-10150-1.2)
- PCLD-785** 16-channel Relay Output Board, user's manual, 1m 20-pin flat cable assembly (P/N: PCL-10120-1)
- PCL-10120-1** 20-pin flat cable assembly, 1m
- PCL-10120-2** 20-pin flat cable assembly, 2m
- PCL-10150-1.2** 50-pin flat cable, 1.2m (connects the PCL-722 or 724 to the PCLD-885, 782B or 785B)

Features

- Accepts 20-pin or 50-pin (Opto-22 compatible) connectors
- 16 single-pole single-throw (SPST) relays
- High-power relay handles up to 5 A @ 250 V_{AC}
- Onboard varistors protect all relay contact points
- Industrial screw terminals for ease of wiring
- LED On/Off status indication for each relay
- +5 V/+12 V power/status LED indicator

Specifications

Relay

- Breakdown Voltage** 750 V_{AC} for 1 minute, between open contacts
2500 V_{AC} for 1 minute, between coil and contacts
- Contact Rating** AC: 250 V @ 5 A
DC: 30 V @ 5 A
- Contact Resistance** 30 mΩ max.
- Insulation Resistance** 1000 mΩ @ 500 V_{DC}
- Life Expectancy** >100,000 cycles at rated load
- Relay on Time** 6 ms max.
- Relay off Time** 3 ms max.
- Relay Type** SPST (Form A), normally open

Varistor

- Clamping Voltage** 760 V (10 A)
- Max. Peak Current** 1200 A for 8 msec.
- Max. Applied Voltage** 300 V_{RMS} AC continuous
- Varistor Voltage** 470 V (current = 1 mA)

General

- Power Consumption** 12 V @ 22 mA for each relay, 352 mA if all relays energized; 5 V @ 200 mA max.
- Connectors**

Input:	20-pin flat cable or 50-pin Opto-22 compatible
Output:	Barrier strip screw terminal
- Dimensions (LxW)** 205 x 114 mm (8" x 4.5")
- Operating Temperature** 0 - 60° C (32 - 140° F)

Ordering Information

- PCLD-885** 16-channel Power Relay Output Board, one 1m 20-pin flat cable assembly (P/N: PCL-10120-1) and a 1.2m 50-pin flat cable assembly (P/N: PCL-10150-1.2)