


# L-400

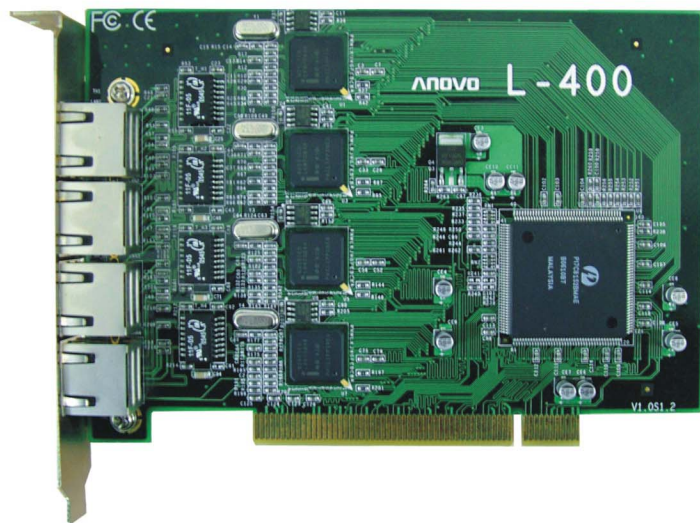

## Introduction

It provides four RJ-45 10/100 BASE-TX ports which are compliant with IEEE802.3u 100 BASE-TX standard, completely integrate MAC and PHY layer.

## Spec

- ◆ BUS PCI
- ◆ Full-duplex Full-duplex and semi-duplex compliant
- ◆ Interface RJ-45
- ◆ Transmission Rate 10/100M
- ◆ Ethernet Standard IEEE 802.3, IEEE802.3u
- ◆ Operating System Linux2.2, 2.4; Windows Xp, 2000, NT4.0; UnixWare 7; Novell NetWare 6.x, 5.x, 4.2; OpenServer 5; Sun SolarisX 86
- ◆ LED indicator TX/RX with transmission rate:10/100M
- ◆ Operation Temp 0°C-60°C
- ◆ Relative Humidity 10°C-95°C
- ◆ Dimension 150mm x 98mm

## Features

- ◆ PCI2.1/PCI Birdge 1.1/ACPI 1.1 specification compliant
- ◆ Intel 82551ER chipset ,four 10/100M LAN
- ◆ IEEE 802.3 10base -T and IEEE 802.3u 100base-TX
- ◆ Support full-duplex mode with bandwidth from 20Mbps to 200Mbps