


# IP-6S Backplane

## Dimension

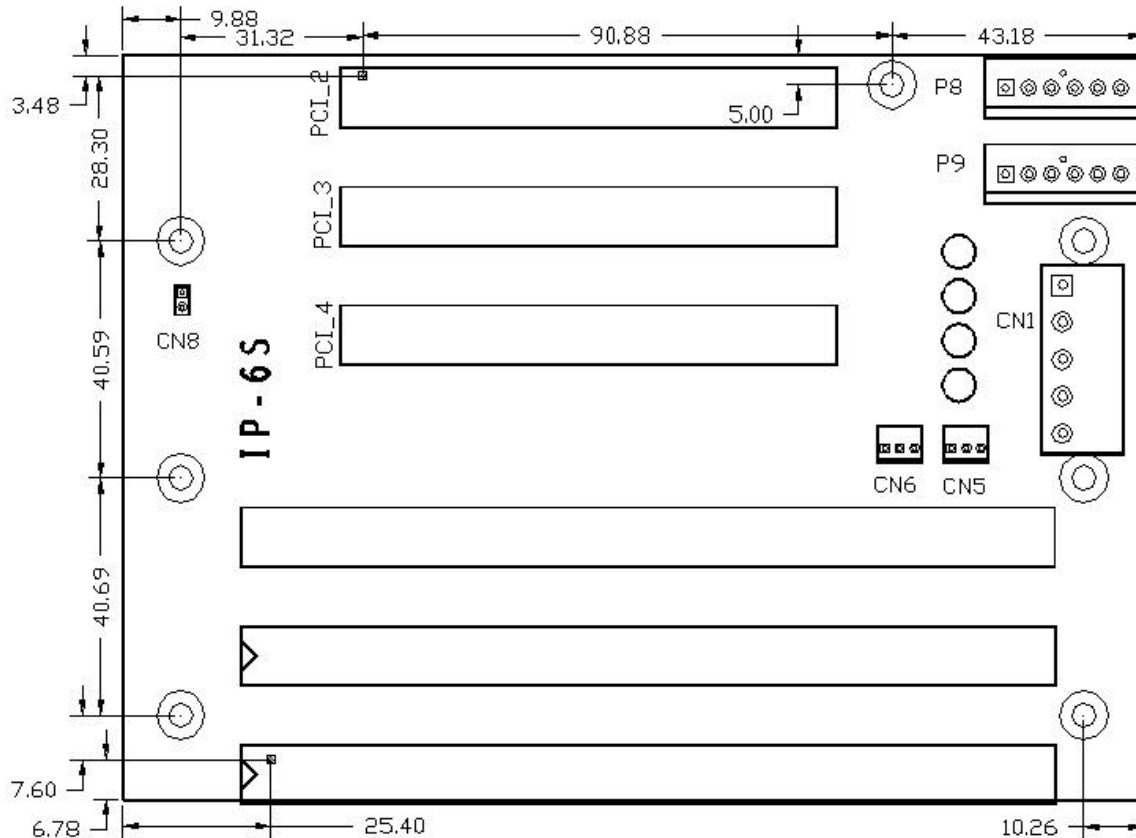

## Routing List

SIGNAL	PIN No.	PCI_2	PCI_3	PCI_4
REQ#	B18	REQ1#	REQ2#	REQ3#
GNT#	A17	GNT1#	GNT2#	GNT3#
CLOCK	B16	CLK1	CLK2	CLK3
IDSEL	A26	AD20	AD21	AD22
INTA#	A6	D	C	B
INTB#	B7	A	D	C
INTC#	A7	B	A	D
INTD#	B8	C	B	A

## Connectors

CONNECTOR	DESCRIPTION
PISA_1	PISA connector
ISA_1,ISA_2	16-BIT ISA BUS connectors
PCI_2-PCI_4	32-BIT PCI BUS connectors
P8,P9	P8/P9 power connector
CN1	DC power outlet
CN5,CN6	Fan connector
CN8	Power good signal output

## Pin Assignment

P8/P9 power connector(P8,P9)			
P8		P9	
PIN	NAME	PIN	NAME
1	PWR OK	1	GND
2	+5V	2	GND
3	+12V	3	-5V
4	-12V	4	+5V
5	GND	5	+5V
6	GND	6	+5V

Power Extension(CN1)	
PIN	NAME
1	+5V
2	-5V
3	-12V
4	+12V
5	GND

Fan connector(CN5,CN6)	
PIN	NAME
1	NC
2	+12V
3	GND

Power Good output(CN8)	
PIN	NAME
1	Power Good
2	GND