

AWK-3131A Series

Industrial IEEE 802.11n wireless AP/bridge/client



- > IEEE 802.11a/b/g/n AP/bridge/client support
- > Seamless roaming with Turbo Roaming
- > Complete redundancy with AeroLink Protection
- > Integrated antenna and power isolation
- > -40 to 75°C operating temperature range (-T models)

Introduction

The AWK-3131A 3-in-1 industrial wireless AP/bridge/client meets the growing need for faster data transmission speeds by supporting IEEE 802.11n technology with a net data rate of up to 300 Mbps. The AWK-3131A is compliant with industrial standards and approvals covering operating temperature, power input voltage, surge, ESD, and vibration. The two redundant DC power inputs increase the reliability of the power supply, and the AWK-3131A can be powered via PoE to make deployment easier. The AWK-3131A can operate on either the 2.4 or 5 GHz bands and is backwards-compatible with existing 802.11a/b/g deployments to future-proof your wireless investments.

Advanced 802.11n Industrial Wireless Solution

- 802.11a/b/g/n compliant AP/bridge/client for flexible deployment
- Software optimized for long distance (LoS, 1 km) wireless communication with external high-gain antenna (Pending, available in Q4 2015)

- Max. 100 clients association with tested 60 concurrent clients communication (AP mode)
- DFS channel support allows a wider range of 5 GHz channel selection to avoid existing wireless infrastructure and interference

Advanced Wireless Technology

- Seamless roaming with Client-based Turbo Roaming for < 150 ms roaming recovery time between APs (Client mode)
- Supports AeroLink Protection for creating a redundant wireless link (< 300 ms recovery time) between AP and Clients (Client mode)

Industrial Ruggedness

- Integrated antenna and power isolation designed to provide 500 V insulation protection against external electrical interference
- Hazardous location wireless communication with Class I Div II and ATEX Zone 2 certifications (Pending, available in Q4 2015)
- -40 to 75°C wide operating temperature models (-T) provided for smooth wireless communication in harsh environments

Specifications

WLAN Interface

Standards:

IEEE 802.11a/b/g/n for Wireless LAN
 IEEE 802.11i for Wireless Security
 IEEE 802.3 for 10BaseT
 IEEE 802.3u for 100BaseT(X)
 IEEE 802.3ab for 1000BaseT
 IEEE 802.3af for Power-over-Ethernet
 IEEE 802.1D for Spanning Tree Protocol
 IEEE 802.1w for Rapid STP
 IEEE 802.1Q for VLAN

Spread Spectrum and Modulation (typical):

- DSSS with DBPSK, DQPSK, CCK
- OFDM with BPSK, QPSK, 16QAM, 64QAM
- 802.11b: CCK @ 11/5.5 Mbps, DQPSK @ 2 Mbps, DBPSK @ 11 Mbps
- 802.11a/g: 64QAM @ 54/48 Mbps, 16QAM @ 36/24 Mbps, QPSK @ 18/12 Mbps, BPSK @ 9/6 Mbps
- 802.11n: 64QAM @ 300 Mbps to BPSK @ 6.5 Mbps (multiple rates supported)

Operating Channels (central frequency):

US:

2.412 to 2.462 GHz (11 channels)
 5.180 to 5.240 (4 channels)
 5.260 to 5.320 (4 channels)*
 5.500 to 5.700 GHz (8 channels - excludes 5.600 to 5.640 GHz)*
 5.745 to 5.825 GHz (5 channels)

EU:

2.412 to 2.472 GHz (13 channels)
 5.180 to 5.240 (4 channels)
 5.260 to 5.320 (4 channels)*
 5.500 to 5.700 GHz (11 channels)*

JP:

2.412 to 2.484 GHz (14 channels)
 5.180 to 5.240 (4 channels)
 5.260 to 5.320 (4 channels)*
 5.500 to 5.700 GHz (11 channels)*

Certification in progress. DFS channels will be available by Q4 2015 via software upgrade.

Security:

- SSID broadcast enable/disable
- Firewall for MAC/IP/Protocol/Port-based filtering
- 64-bit and 128-bit WEP encryption, WPA /WPA2-Personal and Enterprise (IEEE 802.1X/RADIUS, TKIP and AES)

Transmission Rates:

802.11b: 1, 2, 5.5, 11 Mbps
 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
 802.11n: 6.5 to 300 Mbps (multiple rates supported)

TX Transmit Power:

802.11b:
 Typ. 23±1.5 dBm @ 1 Mbps, Typ. 23±1.5 dBm @ 2 Mbps,
 Typ. 20±1.5 dBm @ 5.5 Mbps, Typ. 19±1.5 dBm @ 11 Mbps
 802.11g:
 Typ. 20±1.5 dBm @ 6 to 24 Mbps, Typ. 19±1.5 dBm @ 36 Mbps,
 Typ. 18±1.5 dBm @ 48 Mbps, Typ. 17±1.5 dBm @ 54 Mbps
 802.11n (2.4 GHz):
 Typ. 20±1.5 dBm @ MCS0/8 20 MHz, Typ. 16±1.5 dBm @ MCS7/15
 20 MHz
 Typ. 20±1.5 dBm @ MCS0/8 40 MHz, Typ. 16±1.5 dBm @ MCS7/15
 40 MHz
 802.11a:
 Typ. 20±1.5 dBm @ 6 to 24 Mbps, Typ. 19±1.5 dBm @ 36 Mbps,
 Typ. 16±1.5 dBm @ 48 Mbps, Typ. 15±1.5 dBm @ 54 Mbps
 802.11n (5 GHz):
 Typ. 19±1.5 dBm @ MCS0/8 20 MHz, Typ. 14±1.5 dBm @ MCS7/15
 20 MHz
 Typ. 18±1.5 dBm @ MCS0/8 40 MHz, Typ. 14±1.5 dBm @ MCS7/15
 40 MHz

RX Receive Sensitivity:

802.11b:
 -90 dBm @ 1 Mbps, -88 dBm @ 2 Mbps,
 -86 dBm @ 5.5 Mbps, -84 dBm @ 11 Mbps
 802.11g:
 -85 dBm @ 6 Mbps, -84 dBm @ 9 Mbps,
 -83 dBm @ 12 Mbps, -82 dBm @ 18 Mbps,
 -80 dBm @ 24 Mbps, -76 dBm @ 36 Mbps,
 -70 dBm @ 48 Mbps, -70 dBm @ 54 Mbps
 802.11n (2.4 GHz):
 -70 dBm @ MCS7 20 MHz, -68 dBm @ MCS15 20 MHz
 -65 dBm @ MCS7 40MHz, -63 dBm @ MCS15 40 MHz
 802.11a:
 -92 dBm @ 6 Mbps, -89 dBm @ 9 Mbps,
 -85 dBm @ 12 Mbps, -82 dBm @ 18 Mbps,
 -80 dBm @ 24 Mbps, -76 dBm @ 36 Mbps,
 -74 dBm @ 48 Mbps, -72 dBm @ 54 Mbps
 802.11n (5 GHz):
 -70 dBm @ MCS7 20MHz, -67 dBm @ MCS15 20 MHz
 -68 dBm @ MCS7 40MHz, -66 dBm @ MCS15 40 MHz

Protocol Support

General Protocols: Proxy ARP, DNS, HTTP, HTTPS, IP, ICMP, SNMP, TCP, UDP, RADIUS, SNMP, PPPoE, DHCP, VLAN, STP/RSTP

Interface

Default Antennas: 2 dual-band omni-directional antennas, 2 dBi, RP-SMA (male)
Connector for External Antennas: RP-SMA (female), 500 V insulation
Console Port: RS-232 (RJ45-type)
Reset: Present
LED Indicators: PWR1, PWR2, PoE, FAULT, STATE, signal strength, WLAN, LAN
Alarm Contact (digital output): 1 relay output with current carrying capacity of 1 A @ 24 VDC
Digital Inputs: 2 electrically isolated inputs
 • +13 to +30 V for state "1"
 • +3 to -30 V for state "0"
 • Max. input current: 8 mA

RJ45 Port: 1, 10/100/1000BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

Physical Characteristics

Housing: Metal, IP30 protection
Weight: 1060 g
Dimensions: 52.7 x 135 x 105 mm (2.08 x 5.32 x 4.13 in)
Installation: DIN-Rail mounting (standard), wall mounting (optional)

Environmental Limits

Operating Temperature:
 Standard Models: -25 to 60°C (-13 to 140°F)
 Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature: -40 to 85°C (-40 to 185°F)
Ambient Relative Humidity: 5% to 95% (non-condensing)

Power Requirements

Input Voltage: 12 to 48 VDC, redundant dual DC power inputs or 48 VDC Power-over-Ethernet (IEEE 802.3af compliant)
Connector: 10-pin removable terminal block, 500 V insulation
Power Consumption: Max. 7.2 W (12V/0.6A to 48V/0.15A), 25°C
Reverse Polarity Protection: Present

Standards and Certifications

Safety: UL 60950-1, EN 60950-1
Hazardous Location: UL/cUL Class I Division 2, ATEX Zone 2 (Pending, available Q4 2015)

EMC:

EMI: CISPR 22, FCC Part 15B Class B
 EMS: EN 61000-6-2/61000-6-4
 IEC 61000-4-2 ESD: Contact 8 kV; Air 15 kV
 IEC 61000-4-3 RS: 10 V/m (80 MHz to 1 GHz)
 IEC 61000-4-4 EFT: Power 2 kV; Signal 1 kV
 IEC 61000-4-5 Surge: Power 2 kV; Signal 1 kV
 IEC 61000-4-6 CS: 10 V
 IEC 61000-4-8

Radio: EN 301 489-1/17, EN 300 328, EN 301 893, TELEC, FCC ID SLE-WAPN005

Note: Please check Moxa's website for the most up-to-date certification status.

Reliability


MTBF (mean time between failures): 477,425 hrs

Warranty

Warranty Period: 5 years
Details: See www.moxa.com/warranty

Dimensions

Unit: mm (inch)

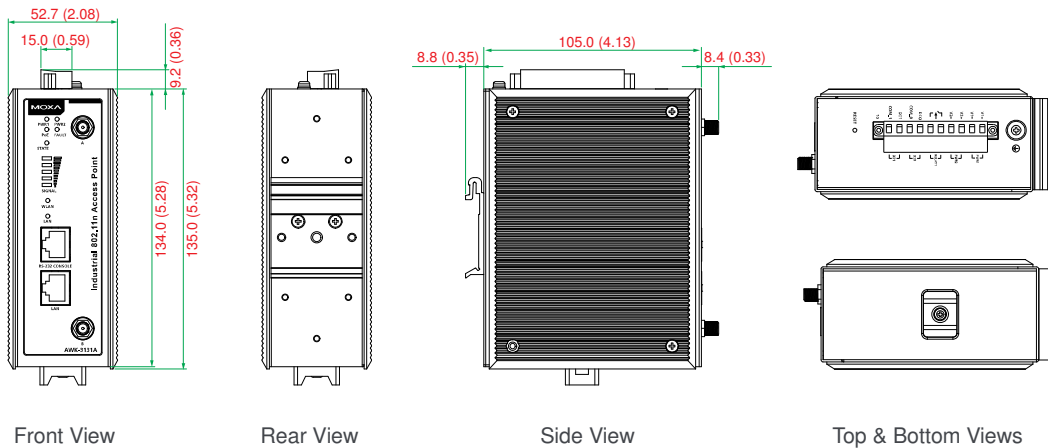

: Ordering Information

Available Models

AWK-3131A-US: IEEE 802.11a/b/g/n wireless AP/bridge/client, US band, -25 to 60°C operating temperature

AWK-3131A-US-T: IEEE 802.11a/b/g/n wireless AP/bridge/client, US band, -40 to 75°C operating temperature

AWK-3131A-EU: IEEE 802.11a/b/g/n wireless AP/bridge/client, EU band, -25 to 60°C operating temperature

AWK-3131A-EU-T: IEEE 802.11a/b/g/n wireless AP/bridge/client, EU band, -40 to 75°C operating temperature

AWK-3131A-JP: IEEE 802.11a/b/g/n wireless AP/bridge/client, JP band, -25 to 60°C operating temperature

AWK-3131A-JP-T: IEEE 802.11a/b/g/n wireless AP/bridge/client, JP band, -40 to 75°C operating temperature

Package Checklist

- AWK-3131A wireless AP/bridge/client
- 2 dual-band omni-directional antennas (2dBi, RP-SMA, 2.4/5 GHz)
- Cable holder with one screw
- 2 plastic RJ45 protective caps
- Quick installation guide (printed)
- Warranty card

